




**MACHINE ROOMLESS (MRL) / MINI MACHINE ROOM (MMR)
MID-RISE PASSENGER LIFT**




**GEARLESS TRACTION MACHINE
ROPING 2:1**

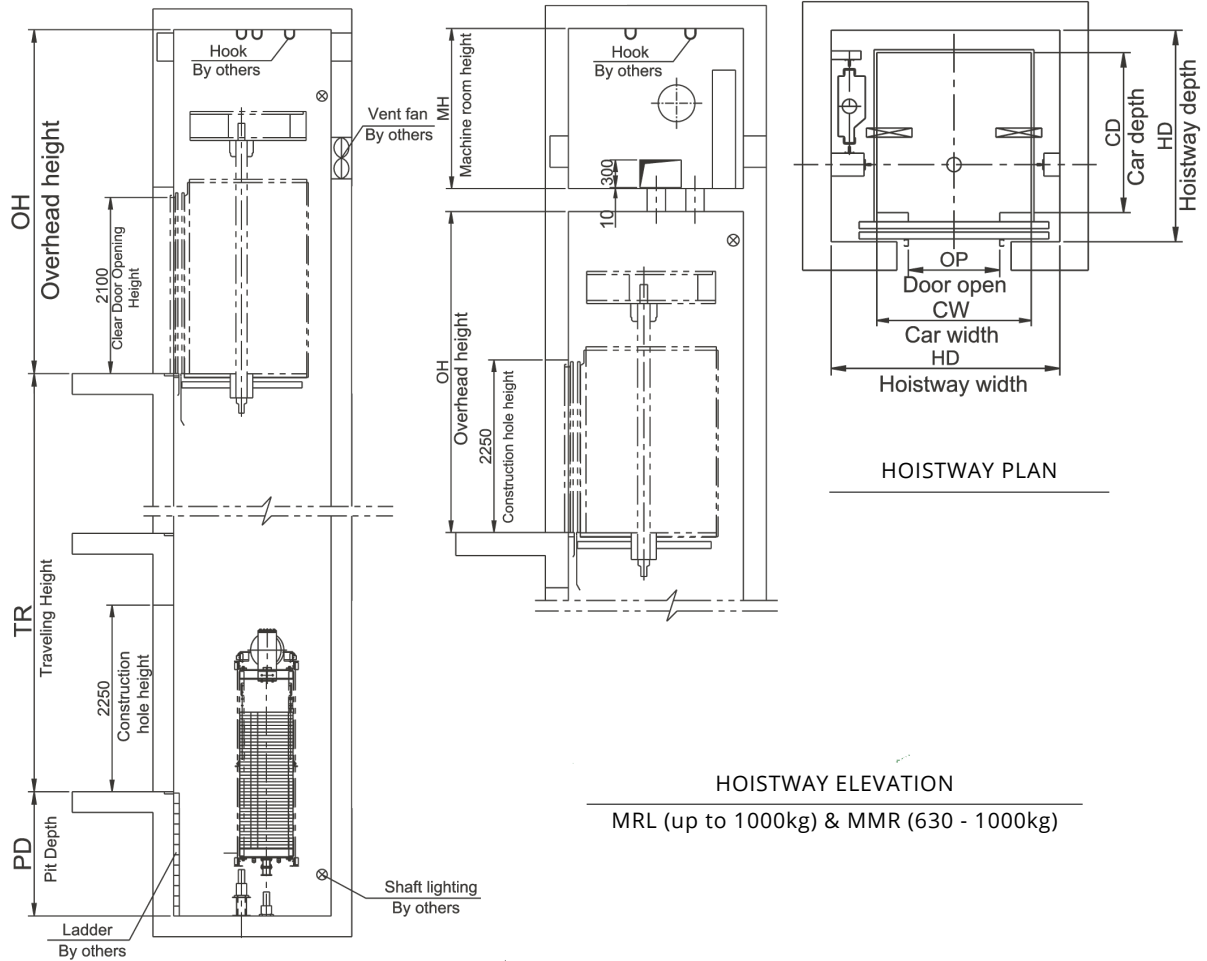

HOISTWAY ELEVATION

MRL (up to 1000kg) & MMR (630 - 1000kg)

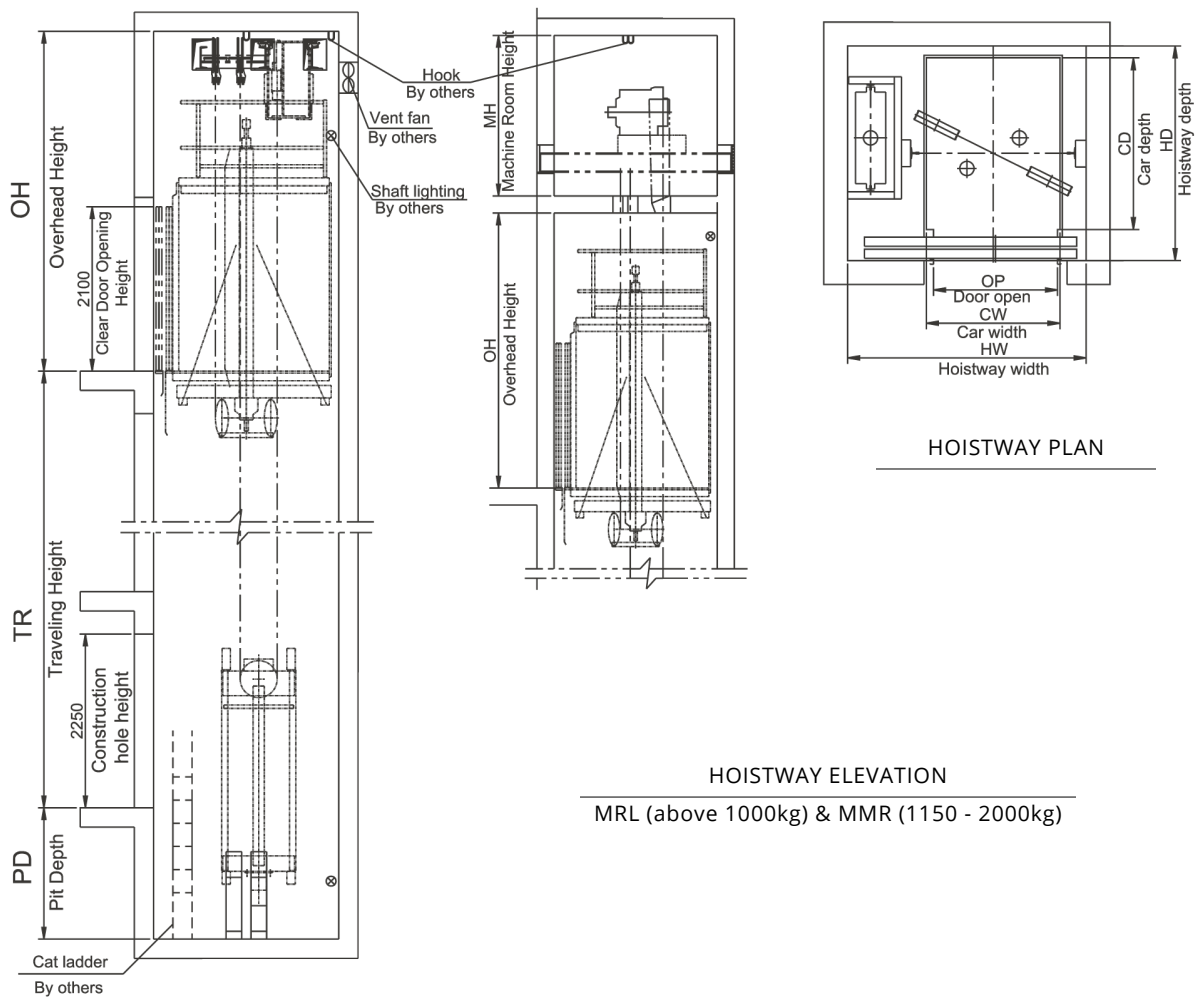

HOISTWAY ELEVATION

MRL (above 1000kg) & MMR (1150 - 2000kg)

MACHINE ROOMLESS (MRL) / MINI MACHINE ROOM (MMR)
MID-RISE PASSENGER LIFT

CAPACITY		CAR			DOOR		SHAFT	
Load	Person	Type	Width	Depth	Type	Opening	Width	Depth
kg	P	CT	CW	CD	DT	DO	HW	HD
630	8	Deep	1100	1400	2CO	800	1850	1850
						900	2000	
					2SO	800	1750	
						900		
		Wide	1200	1300	2CO	700	1650	1900
						800	1800	
800	10	Deep	1100	1700	2CO	800	1850	2150
						900	2000	
					2SO	800	1720	
						900		
		Wide	1400	1350	2CO	800	1850	1950
						900	2000	
						1000	2150	
						1000	13	
900	2000							
2SO	800	1750						
	900							
Wide	1600	1400	2CO	900	2100	2000		
				1000	2200			
				1100	2350			
1150	15	Deep	1400	1800	2SO	1100	2500	2250
						1200		
		Wide	1800	1400	2CO	1100	2900	1850
1250	16	Deep	1400	1950	2SO	1100	2500	2400
						1200		
		Wide	1950	1400	2CO	1100	3050	1850
1350	18	Deep	1400	2100	2SO	1100	2500	2550
						1200		
		Wide	1950	1500	2CO	1100	3050	1950
1600	21	Deep	1400	2400	2SO	1100	2500	2850
						1200		
		Wide	1950	1700	2CO	1100	3050	2150
2000	26	Deep	1600	2500	2SO	1400	2700	2950
		Wide	1950	2100	2CO	1100	3050	2550
Max. Travel: 75m								

Speed	Capacity	Overhead	Pit	Car Clear Height		Door Height
m/s	kg	mm	mm	mm		mm
1.0	800-1000	3800	1400	2200 with suspension ceiling	2100	
	1150-2000	4300	1650			
1.5	800-1000	3950	1500			
	1150-2000	4450	1750			
1.75	800-1000	4050	1550			
	1150-2000	4500	1800			
1.0	800-1000	3800	1400			
	1150-2000	3850	1650			
1.5	800-1000	3950	1500			
	1150-2000	4000	1750			
1.75	800-1000	4050	1550			
	1150-2000	4050	1800			